

# Accessories



**Attachable Sample Draw**  
RP-3R



**Calibration Stations**  
SDM-3R

- Compatible with the GX-3R or GX-3R Pro
- Automate bump tests, calibrations, charging and data retrieval
- Operate up to 10 stations with 1 set of cal equipment



# GO RED

Gas Detection For Life



**Single Gas Clip on**



**With Hose and Probe**  
RP-3R



**Cal Kits**



**Bundled Kits**

- Instrument
- Charger
- Screwdriver
- Carrying case
- Calibration equipment



**Multi-Unit Charging**

Authorized Distributor



**Gas Detection For Life**

(800) 754-5165

[www.rkiinstruments.com](http://www.rkiinstruments.com)



**Smallest & Lightest**  
4 Gas Monitor



**Confined Space with**  
Connected Worker




**Confined Space with**  
Internal Pump



# Trusted Portable Gas Monitoring

## Single Gas Portable Clip-On


### 04 Series

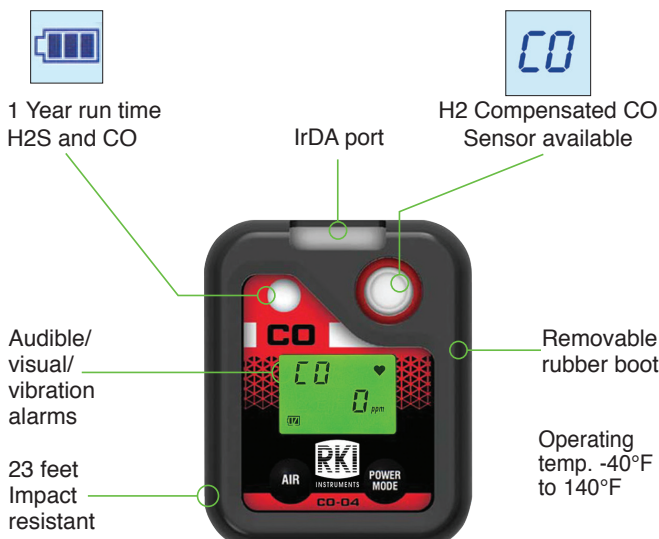

04 Series Standard Confined Space Gases		
Gas Detected	Detection Range	
Carbon Monoxide (CO)	0 - 2000 ppm (1 ppm)	
Carbon Monoxide (CO) H2 Compensated	0 - 2000 ppm (1 ppm)	
Chlorine (Cl2)	0 - 20.00 ppm (0.05 ppm)	
Hydrogen Sulfide (H2S)	0 - 200.0 (0.1 ppm)	
Ammonia (NH3)	0 - 400.0 ppm (0.5 ppm)	
Hydrogen Cyanide (HCN)	0 - 30.0 ppm (0.1 ppm)	
Nitrogen Dioxide (NO2)	0 - 20.00 ppm (0.05 ppm)	
Oxygen (O2)	0 - 40% Vol. (0.1%)	
Phosphine (PH3)	0 - 20.00 ppm (0.01 ppm)	
Sulfur Dioxide (SO2)	0 - 100.00 ppm (0.05 ppm)	

## Smallest & Lightest 4 Gas Monitor

### GX-3R

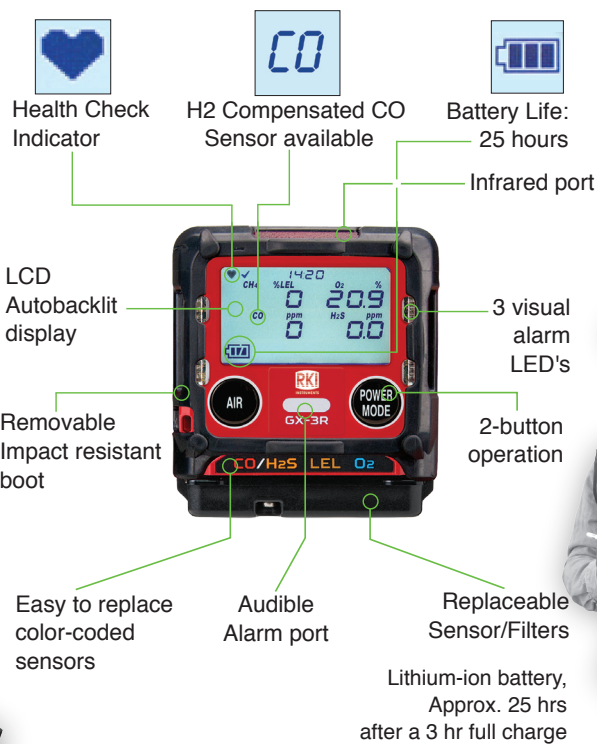

GX-3R Standard Confined Space Gases		
Gas Detected	Detection Range	
Carbon Monoxide (CO)	0 - 2000 ppm (1 ppm)	
Carbon Monoxide (CO) H2 Compensated	0 - 2000 ppm (1 ppm)	
Combustible Gases (Methane as standard)	0 - 100% LEL (1% LEL)	
Hydrogen Sulfide (H2S)	0 - 200.0 ppm (0.1 ppm)	
Oxygen (O2)	0 - 40.0% vol. (0.1% vol.)	

## Confined Space with Connected Worker

### GX-3R Pro



GX-3R Pro Standard Confined Space Gases		
Gas Detected	Detection Range	
Carbon Monoxide (CO)	0 - 2000 ppm (1 ppm)	
Carbon Monoxide (CO) H2 Compensated	0 - 2000 ppm (1 ppm)	
Combustible Gases (Methane as standard)	0 - 100% LEL (1% LEL)	
Hydrogen Sulfide (H2S)	0 - 200.0 ppm (0.1 ppm)	
Oxygen (O2)	0 - 40.0% Vol. (0.1% vol.)	
Ammonia (NH3)	400.0 ppm	
Carbon Dioxide (CO2)	0 - 10.0% Vol (0.01%)	
Hydrogen Cyanide (HCN)	30.00 ppm	
Nitrogen Dioxide (NO2)	20.00 ppm	
Phosphine (PH3)	20.00 ppm	
Sulfur Dioxide (SO2)	0 - 100.00 ppm (0.05 ppm)	

## Confined Space with Internal Pump

### GX-Force



GX-Force Standard Confined Space Gases		
Gas Detected	Detection Range	
Carbon Monoxide (CO)	0 - 2000 ppm (1 ppm)	
Combustible Gases (Methane as standard)	0 - 100% LEL (1% LEL)	
Hydrogen Sulfide (H2S)	0.0 - 200.0 ppm (0.1 ppm)	
Oxygen (O2)	0.0 - 40.0% Vol (0.1% Vol)	

- Single Platform for all Models**
- 3 Year warranty on all models!
  - Common sensors
  - Same controls and menus
  - Field replaceable sensors and filters

