


Fixed Systems Sensors & Transmitters

GD-K88Ai Diffusion Sensor / Transmitter For Toxic Gases With Display

(Intrinsically safe when used with I.S. Barrier)

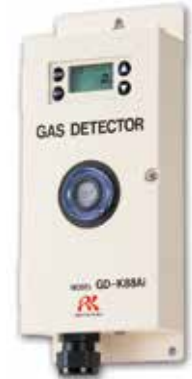

Part#	Description	Suggested Retail
GD-K88Ai-NH3	Smart transmitter, GD-K88Ai, Ammonia (NH3), 0-75 ppm, IS type	1,520.00
GD-K88Ai-ASH3	Smart transmitter, GD-K88Ai, Arsine (AsH3), 0-0.2 ppm, IS type	1,520.00
GD-K88Ai-BTBAS	Smart transmitter, GD-K88Ai, BTBAS, 0-15 ppm, IS type	1,520.00
GD-K88Ai-CO	Smart transmitter, GD-K88Ai, Carbon Monoxide (CO), 0-150 ppm, IS type	1,520.00
GD-K88Ai-CL2	Smart transmitter, GD-K88Ai, Chlorine (Cl2), 0-3.00 ppm, IS type	1,520.00
GD-K88Ai-B2H6	Smart transmitter, GD-K88Ai, Diborane (B2H6), 0-0.3 ppm, IS type.....	1,520.00
GD-K88Ai-Si2H6	Smart transmitter, GD-K88Ai, Disilane (Si2H6), 0-15 ppm, IS type	1,520.00
GD-K88Ai-HCN	Smart transmitter, GD-K88Ai, Hydrogen Cyanide (HCN), 0-15.0 ppm, IS type	1,520.00
GD-K88Ai-H2S-01	Smart transmitter, GD-K88Ai, Hydrogen Sulfide (H2S), 0-1 ppm, IS type	1,520.00
GD-K88Ai-H2S-30	Smart transmitter, GD-K88Ai, Hydrogen Sulfide (H2S), 0-30 ppm, IS type	1,520.00
GD-K88Ai-PH3	Smart transmitter, GD-K88Ai, Phosphine (PH3), 0-1 ppm, IS type	1,520.00
GD-K88Ai-SiH4-AH	Smart transmitter, GD-K88Ai, Silane (SiH4), 0-15 ppm, AH sensor, low H2 response, IS type	1,520.00
GD-K88Ai-SiH4-DH	Smart transmitter, GD-K88Ai, Silane (SiH4), 0-15 ppm, DH sensor, with H2 response, IS type	1,520.00

Replacement Sensors

Part#	Description	Suggested Retail
ESM-23R-NH3	Sensor, Ammonia (NH3), 0-75 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23RH-NH3	Sensor, Ammonia (NH3), 0-75 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000, high humidity use	505.00
ESM-23AHS-ASH3	Sensor, Arsine (AsH3), 0-0.2 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23-CO	Sensor, Carbon Monoxide (CO), 0-150 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-K233-CL2	Sensor, Chlorine (Cl2), 0-3 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23AY-B2H6	Sensor, Diborane (B2H6), 0-0.3 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23DH-Si2H6	Sensor, Disilane (Si2H6), 0-15 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23DH-GEH4	Sensor, Germane (GeH4), 0-0.8 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-K233-HCL	Sensor, Hydrogen Chloride (HCl), 0-15 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23DH-HCN	Sensor, Hydrogen Cyanide (HCN), 0-15 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23DH-MS	Sensor, Methyl Silane (CH3SiH3), 0-20 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23AH-NO2	Sensor, Nitrogen Dioxide (NO2), 0-15 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23AH-PH3	Sensor, Phosphine (PH3), 0-1 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23DH-SiH4	Sensor, Silane (SiH4), 0-15 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000, with H2 response	505.00
ESM-23AH-SiH4	Sensor, Silane (SiH4), 0-15 ppm, low H2 response, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000	505.00
ESM-23E-SO2	Sensor, Sulfur Dioxide (SO2), 0-30 ppm, for GD-K88Ai, GD-K71D, GD-K77D, and SC-8000.....	505.00
ESM-238-SO2	Sensor, Sulfur Dioxide (SO2), 0-6 ppm, for GD-K71D, GD-K77D, and SC-8000.....	505.00

Notes

- The previously listed gases can be detected with the GD-K88Ai, however a sample drawing system is recommended for: BCl3, HF, HBr, HCl, HCN, and O3.

GD-K88Ai Diffusion Sensor / Transmitter For Toxic Gases With Display

Accessories

Part#	Description	Suggested Retail
21-0401	Housing, polycarbonate with clear cover for up to 4 MTL5500 series barriers	420.00
21-0402	Housing, polyester with clear cover for up to 10 MTL5500 series barriers	1,630.00
43-7013	IS Barrier, isolator, 2- or 3-wire 4-20 mA transmitter or HART, MTL5541	1,761.00
81-1114RK	Cal cup, diffusion, super toxic, GD-K8A, (rim feed)	28.00