




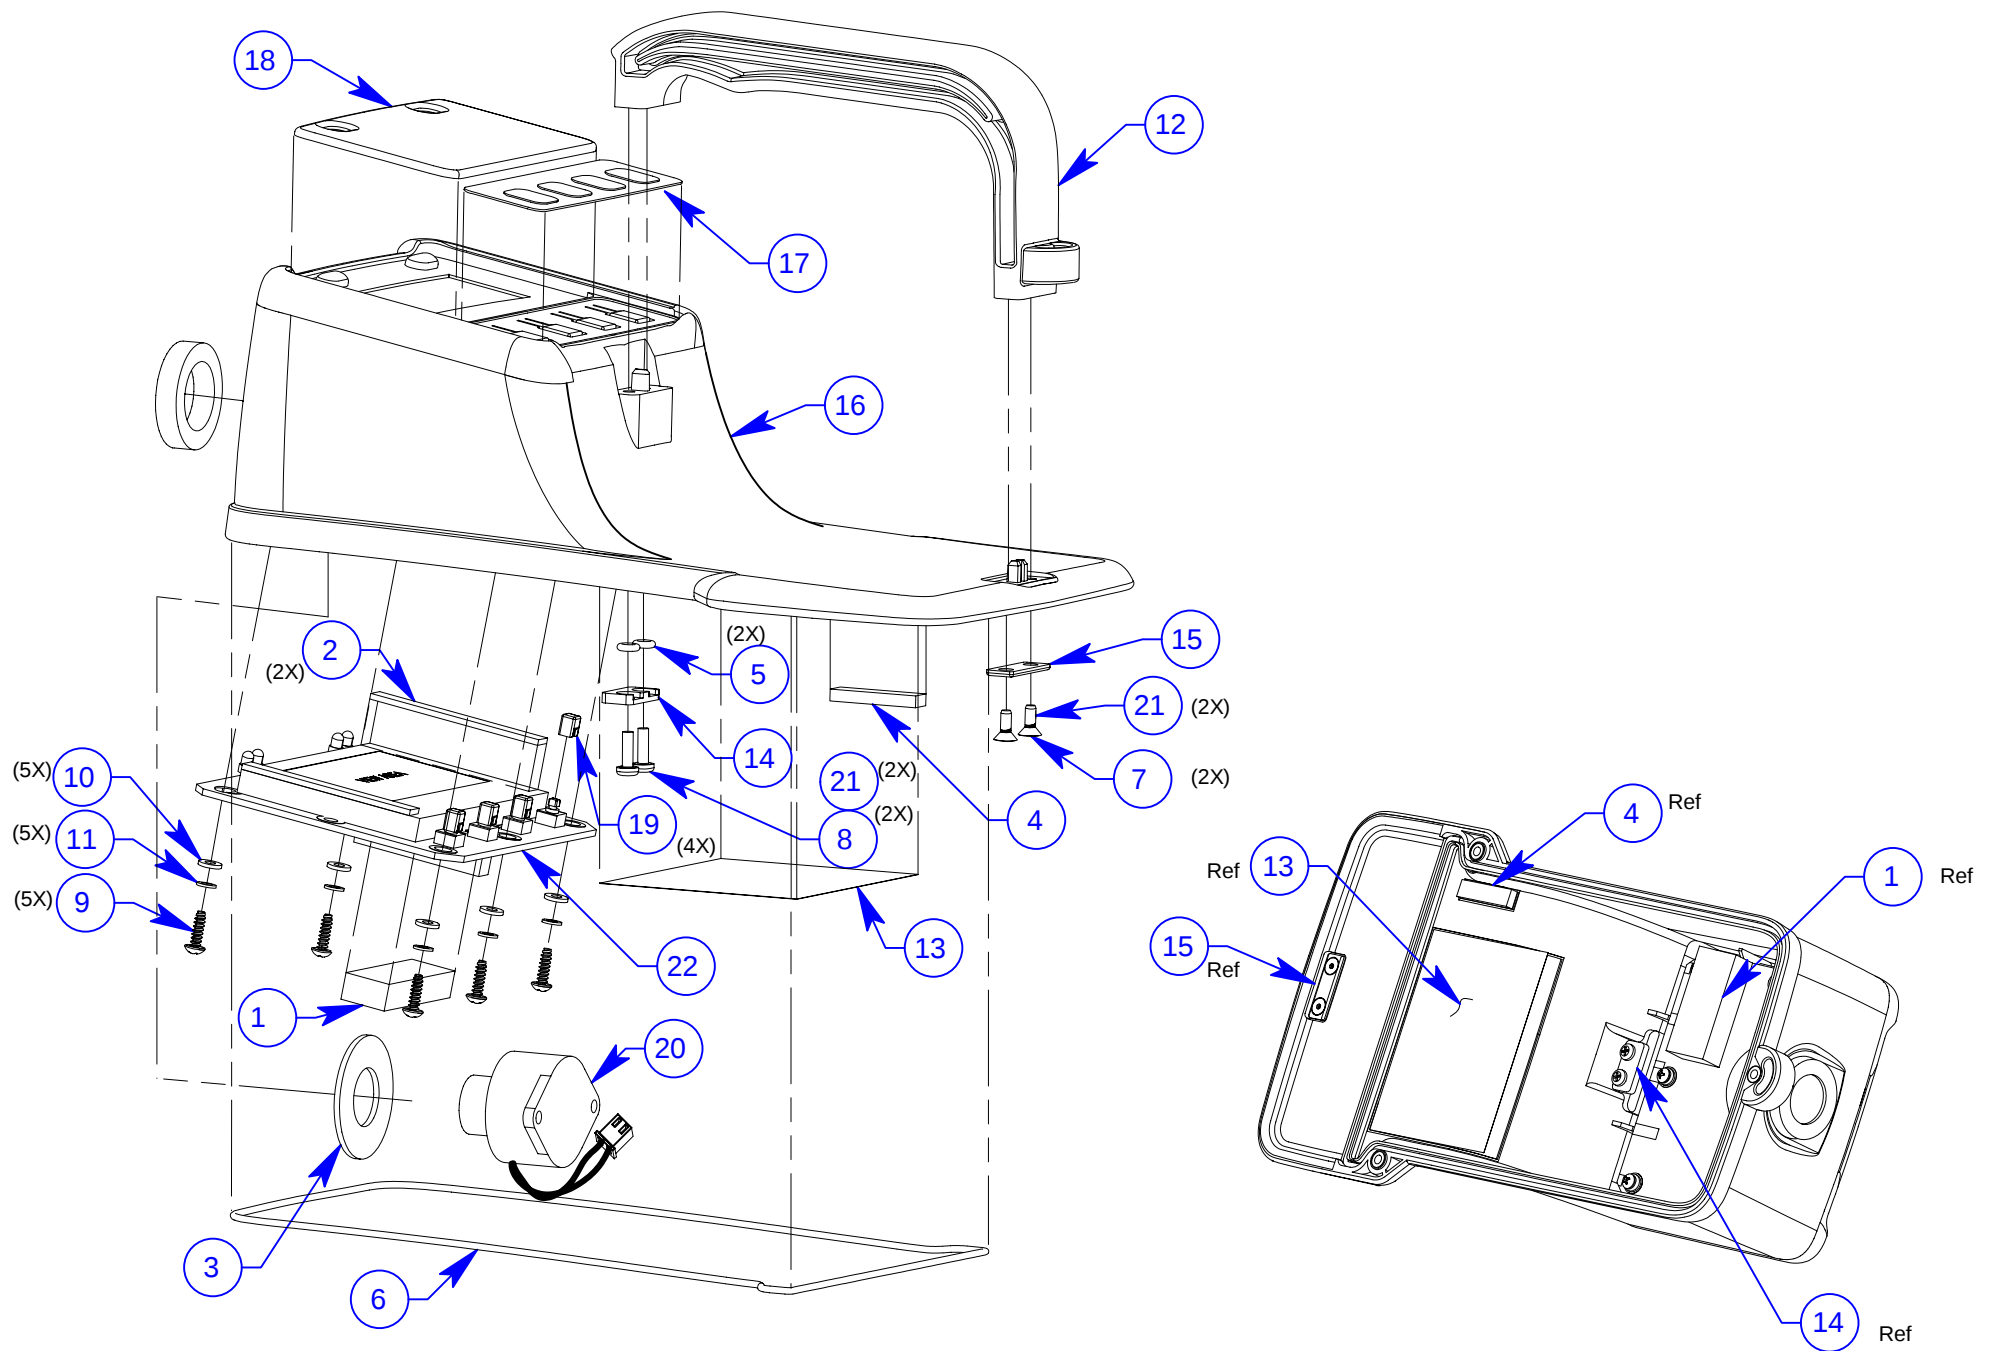


| Item | Part Number  | Description                                      | QTY |
|------|--------------|--------------------------------------------------|-----|
| 1    | 07-0017RK    | Main PCB hold down pad, front                    | 1   |
| 2    | 07-0132RK    | Gasket, LCD Display Glass                        | 2   |
| 3    | 07-0133RK    | Gasket, Buzzer                                   | 1   |
| 4    | 07-0134RK    | Foam Pad, Main PCB hold down, rear               | 1   |
| 5    | 07-7005RK    | O-ring, .101 ID x .070, buna-N                   | 2   |
| 6    | 07-7070RK-50 | O-ring, 7.00 ID x >.076, BN, 50 durometer        | 1   |
| 7    | 10-0117RK    | Screw, MS, 4-40 x 5/16 FH, Skt Cap, SS           | 2   |
| 8    | 10-0119RK-01 | Screw, MS, 4-40 x 3/8, Pan Head, w/Oring, SS     | 2   |
| 9    | 10-0121RK    | Screw, Tri-P, phillips, thrd forming, 4-24 x 3/8 | 5   |
| 10   | 11-0220RK    | Washer, Polycarbonate, #4, .115 ID, .250 OD      | 5   |
| 11   | 11-0221RK    | Washer, Split Lock, #4                           | 5   |
| 12   | 13-0002RK    | Handle, Molded w/inserts                         | 1   |
| 13   | 14-0011RK    | Insulator, Top Case                              | 1   |
| 14   | 14-0050RK    | Bracket, Handle, Forward                         | 1   |
| 15   | 14-0051RK    | Bracket, Handle, Lower                           | 1   |
| 16   | 21-0630RK    | Top Case, RTP, Sprayed w/inserts                 | 1   |
| 17   | 29-0338RK    | Label, Switches                                  | 1   |
| 18   | 29-0339RK    | Label, Display Overlay                           | 1   |
| 19   | 43-0417RK-01 | Switch Keycap, 4mm Sq. Omron B3F Switch          | 4   |
| 20   | 52-1019RK-01 | Buzz, Panel/Flange Mount, w/cable & conn         | 1   |
| 21   | 08-0202RK    | Thread Lock, Loctite 243                         | A/R |
| 22   | 57-0103RK    | PCB Assembly, LCD                                | 1   |

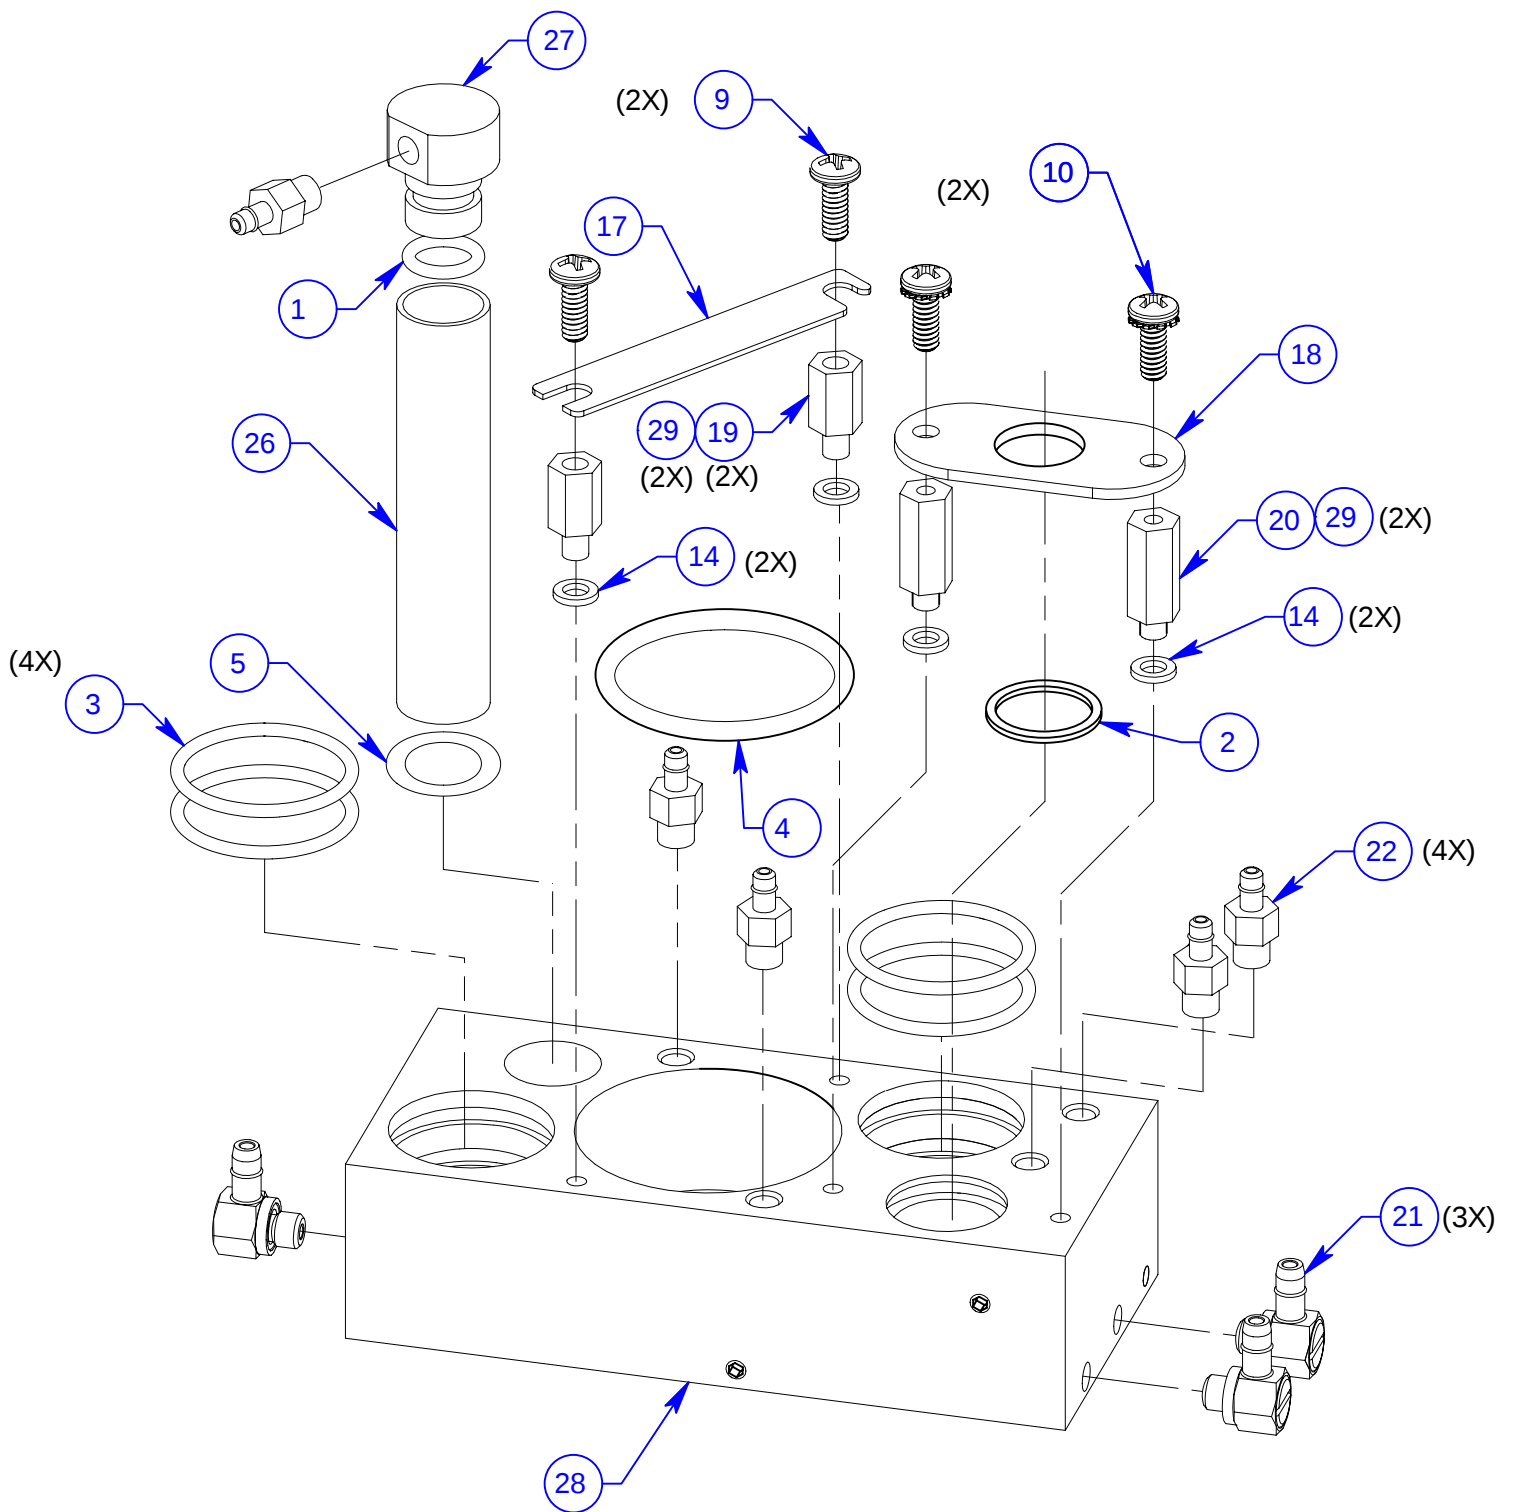


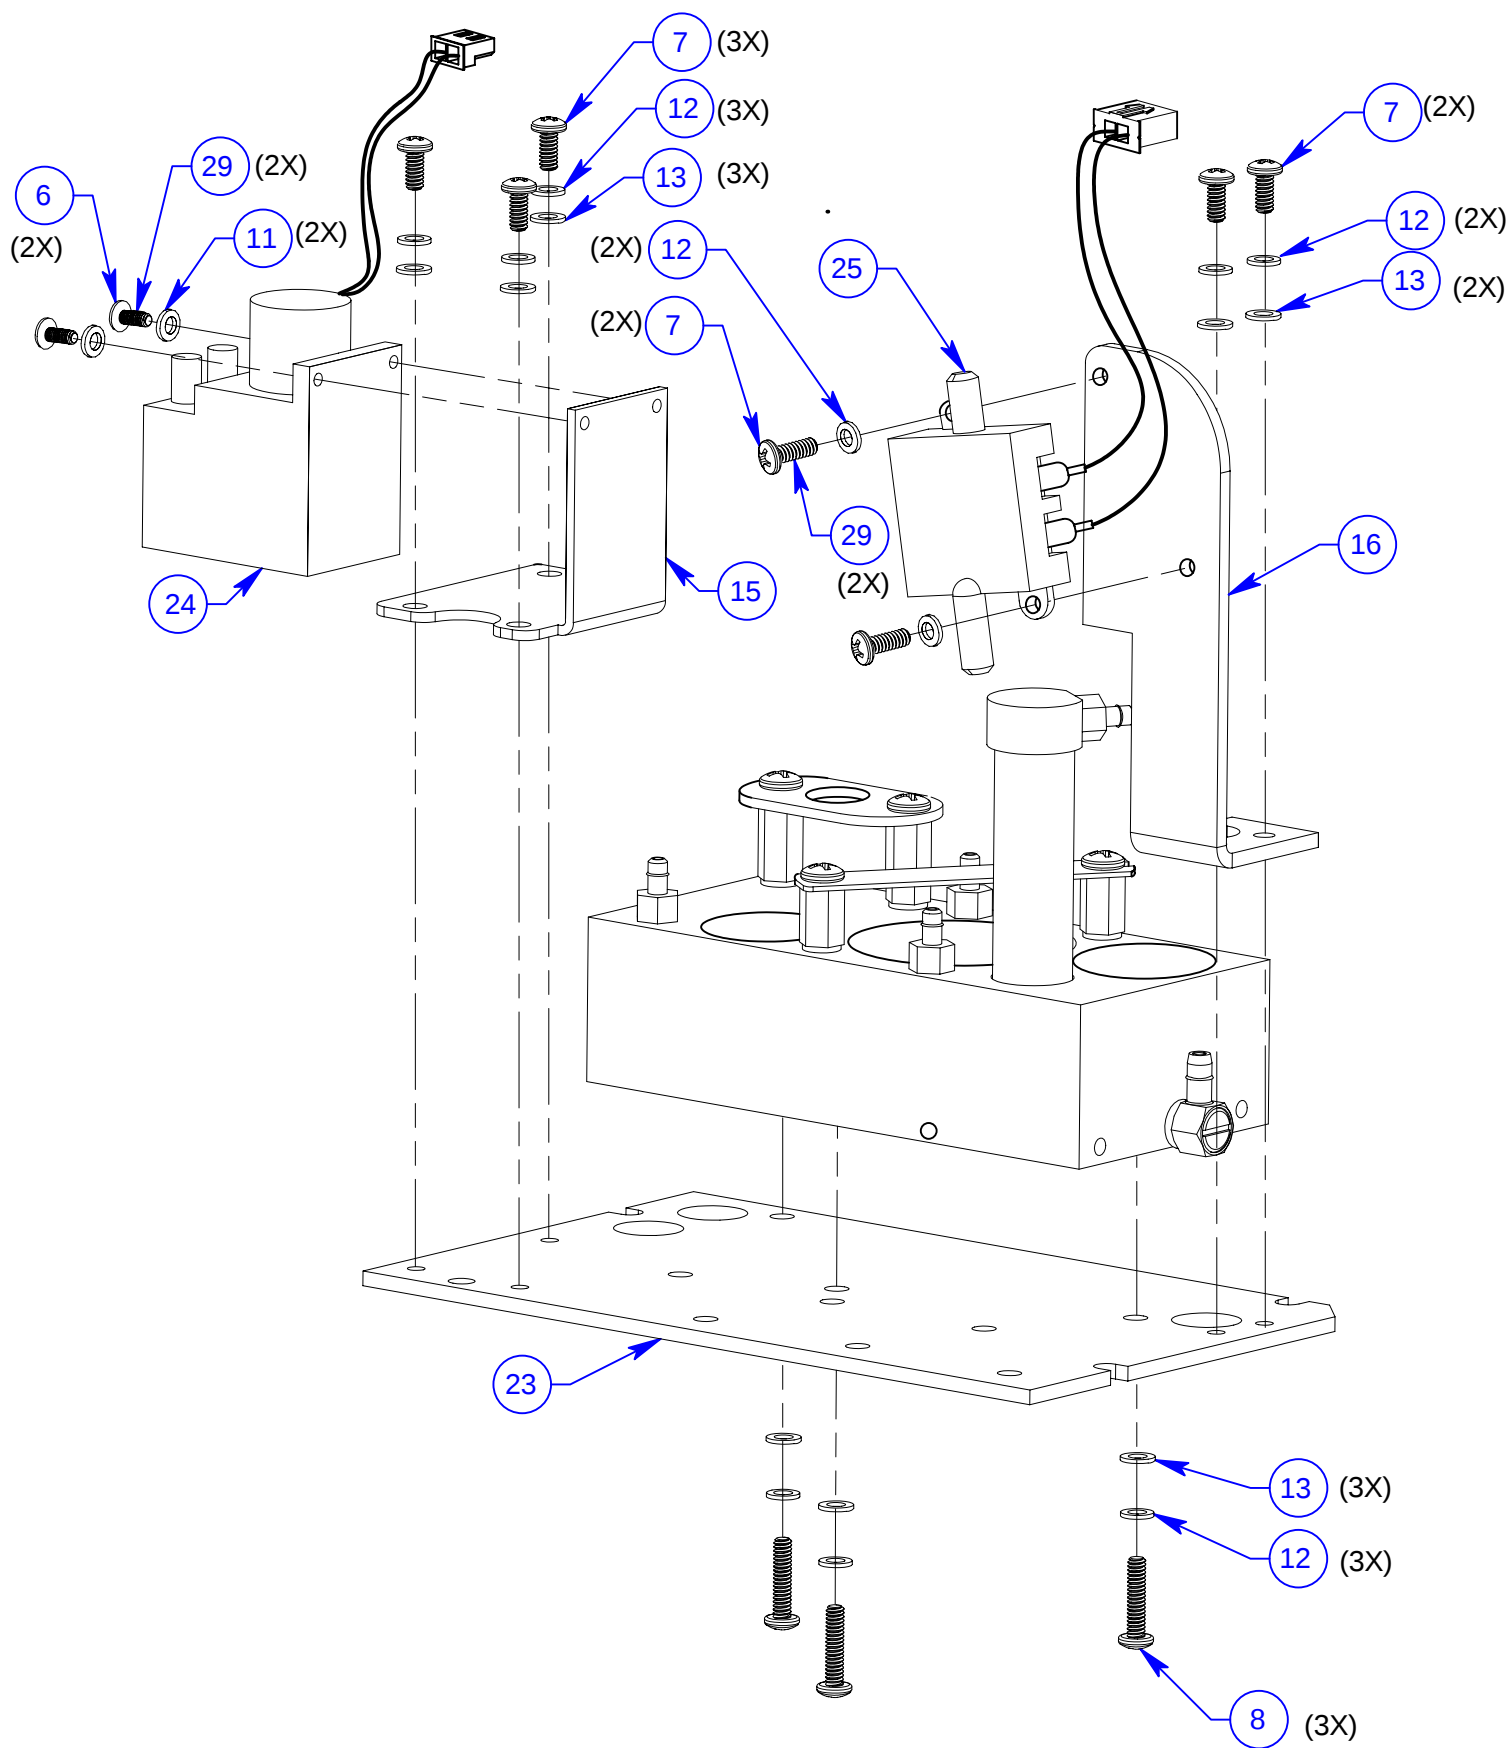

| Item | Part Number  | Description                                   | QTY |
|------|--------------|-----------------------------------------------|-----|
| 1    | 07-7010RK    | O-ring, .239 ID x .070, BN                    | 1   |
| 2    | 07-7016RK-01 | O-ring, .614 ID x .070, QUAD BN               | 1   |
| 3    | 07-7020RK    | O-ring, .864 ID x .070, BN                    | 4   |
| 4    | 07-7123RK    | O-ring, .864 ID x .070, BN                    | 1   |
| 5    | 07-7206RK-50 | O-ring, 0.484 ID x .139, Buna, 50 durometer   | 1   |
| 6    | 10-0027RK    | Screw, MS, 2-56 x 1/4, PH, Phillips           | 2   |
| 7    | 10-0109RK    | Screw, MS, 4-40 x 1/4 PH, Phillips            | 7   |
| 8    | 10-0129RK    | Screw, MS, 4-40 x 1/2 PH, Phillips            | 3   |
| 9    | 10-0194RK    | Screw, 6-32 x 1/4, PAN, phillips, SS          | 2   |
| 10   | 10-0194RK-05 | Screw, 6-32 x 1/4, Sems, PAN, Phillips, SS    | 2   |
| 11   | 11-0212RK    | Washer, INT. TOOTH, 2-56                      | 2   |
| 12   | 11-0221RK    | Washer, split lock, #4                        | 10  |
| 13   | 11-0222RK    | Washer, FLAT, #4, .125 ID x .28 OD x .026 thk | 8   |
| 14   | 11-0231RK    | Washer, split lock, #6                        | 4   |
| 15   | 14-0047RK    | Bracket, Mounting, Pump, Eagle 2              | 1   |
| 16   | 14-0048RK    | Bracket, Mounting, DP Switch, Eagle 2         | 1   |
| 17   | 14-0102RK    | Strap, O2 Cell                                | 1   |
| 18   | 14-0103RK    | Strap, LEL Sensor, Eagle                      | 1   |
| 19   | 14-0568RK-01 | Standoff, hex, 6-32 x 3/8, M/F, SS            | 2   |
| 20   | 14-0570RK-01 | Standoff, hex, 6-32 x 9/16, M/F, SS           | 2   |
| 21   | 17-0632RK    | Elbow, adj, 10-32 x .125 brab, Ni-plate       | 3   |
| 22   | 17-0633RK    | Fitting, STRT, 10-32 x .093 barb, Ni-plate    | 5   |
| 23   | 21-3024RK    | Mounting Plate, Flow Systems                  | 1   |
| 24   | 30-0600RK-01 | Pump, diaphragm, w/connector                  | 1   |
| 25   | 31-2050RK    | Sensor, pressure, 0-10MM H2O                  | 1   |
| 26   | 33-6090RK    | Filter, charcoal, for GX-4000                 | 1   |
| 27   | 33-6090RK-02 | End Cap, Charcoal Filter, Eagle 2             | 1   |
| 28   | 35-0139RK-01 | Flow Block, 4 Gas, with plugs                 | 1   |
| 29   | 08-0202RK    | Thread Lock, Loctite 243                      | A/R |

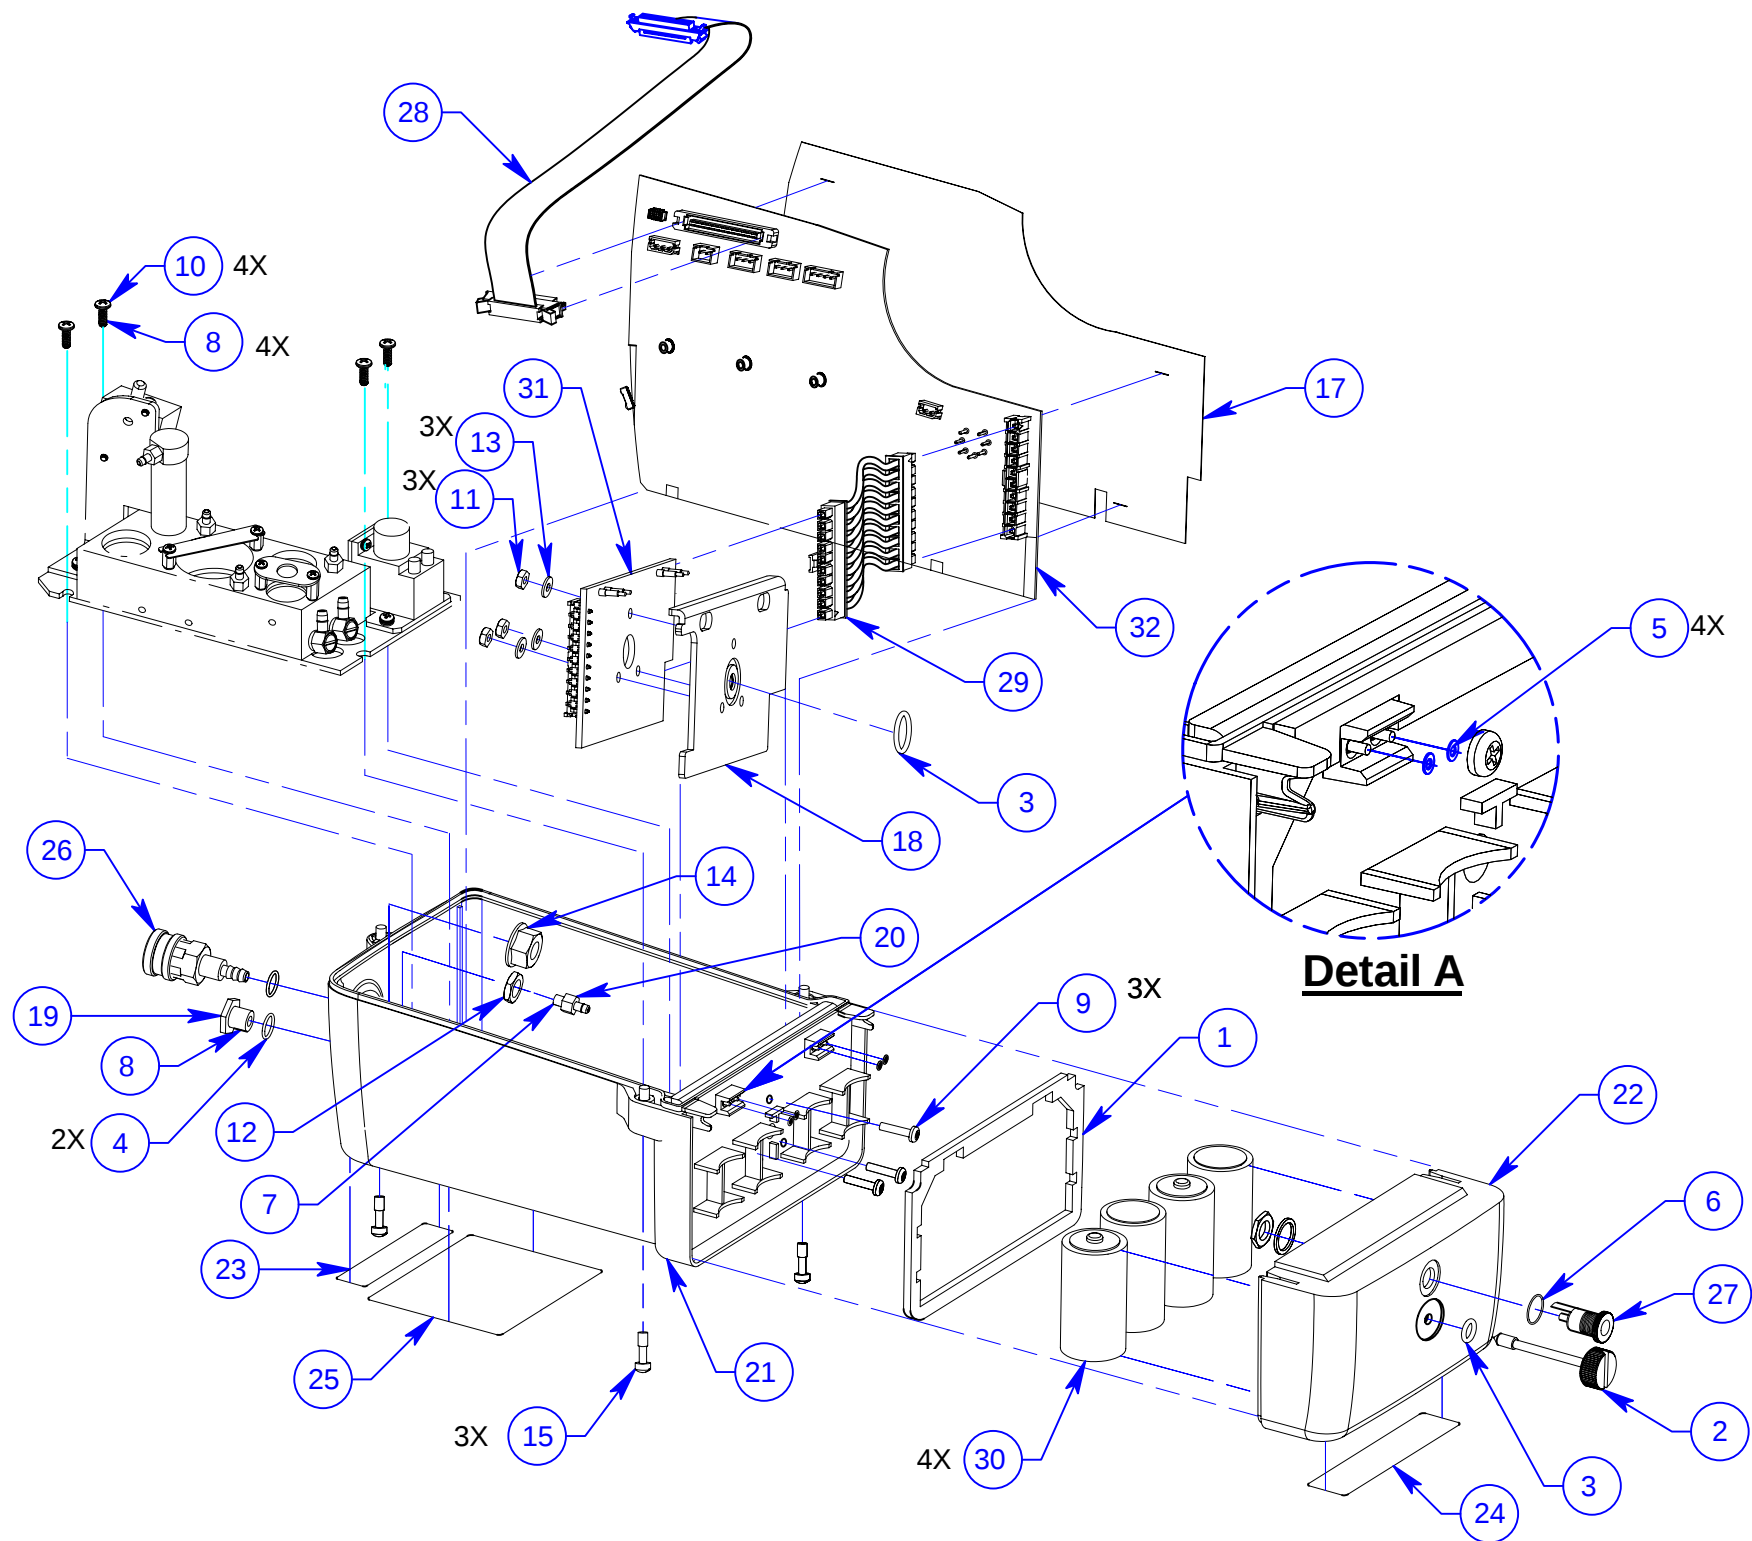


| Item | Part Number  | Description                                       | QTY |
|------|--------------|---------------------------------------------------|-----|
| 1    | 07-0131RK    | Gasket, Battery Pack, Seal                        | 1   |
| 2    | 13-1081RK    | Thumbscrew, Captive, 10-32 x 2.0                  | 1   |
| 3    | 07-7010RK    | O-ring, .239 ID x .070, BN                        | 1   |
| 3    | 07-7014RK    | O-ring, .489 ID x .-070, BN                       | 1   |
| 4    | 07-7300RK    | O-ring, .315 ID x .039, BN                        | 2   |
| 5    | 07-7301RK    | O-ring, .078 x .030, Pogo Pin                     | 4   |
| 6    | 07-7302RK    | O-ring, .425 ID x .024, Charger Jack              | 1   |
| 7    | 08-0191RK    | Loctite 380                                       | A/R |
| 8    | 08-0202RK    | Thread Lock, Loctite 243                          | A/R |
| 9    | 10-0129RK-01 | Screw, MS, 4-40 x 1/2, pan head, w/o-ring, SS     | 3   |
| 10   | 10-0194RK-05 | Screw, 6-32 x 1/4, Sems, PAN, Phillips, SS        | 4   |
| 11   | 11-0023RK    | Nut, KEP, 4-40                                    | 3   |
| 12   | 11-0111RK    | Nut, Jam, Hex, 5/16-32                            | 1   |
| 13   | 11-0222RK    | Washer, Flat, #4, .125 ID x >28 OD x .026 thk     | 3   |
| 14   | 11-4021RK    | Nut, hex flange, M8 x 8 mm, 13 mm hex, SS         | 1   |
| 15   | 13-1061RK    | Panel Screw, Captive, 6-32 x 1/2, PH Phillips, SS | 3   |
| 17   | 14-0010RK    | Insulator, Main PC Board                          | 1   |
| 18   | 14-0142RK    | Plate, Nut                                        | 1   |
| 19   | 17-0480RK    | Fitting, Exhaust                                  | 1   |
| 20   | 17-0633RK    | Fitting, STRT, 10-32 x .093 barb, nickel          | 1   |
| 21   | 21-0631RK    | Bottom Case, RTP, Sprayed w/Inserts               | 1   |
| 22   | 21-0642RK    | Battery Case assembly                             | 1   |
| 23   | 29-0335RK    | Label, Serial Number Set                          | 1   |
| 24   | 29-0336RK    | Label, Battery Case, CSA                          | 1   |
| 25   | 29-0337RK    | Label, Bottom Case, CSA                           | 1   |
| 26   | 30-0522RK    | Fitting, Inlet, female                            | 1   |
| 27   | 45-2311RK    | Jack, Panel mounting for 2.5 x 5.5 mm plug        | 1   |
| 28   | 47-5057RK    | Cable, LCD to Main PCB                            | 1   |
| 29   | 47-5059RK    | Cable, Power                                      | 1   |
| 30   | 49-1130RK    | Battery, Alkaline, size C                         | 4   |
| 31   | 57-0100RK    | PCB Assembly, Pogo Pin/IS Barrier                 | 1   |
| 32   | 57-0102RK-01 | PCB Assembly, Main, with Insulators               | 1   |

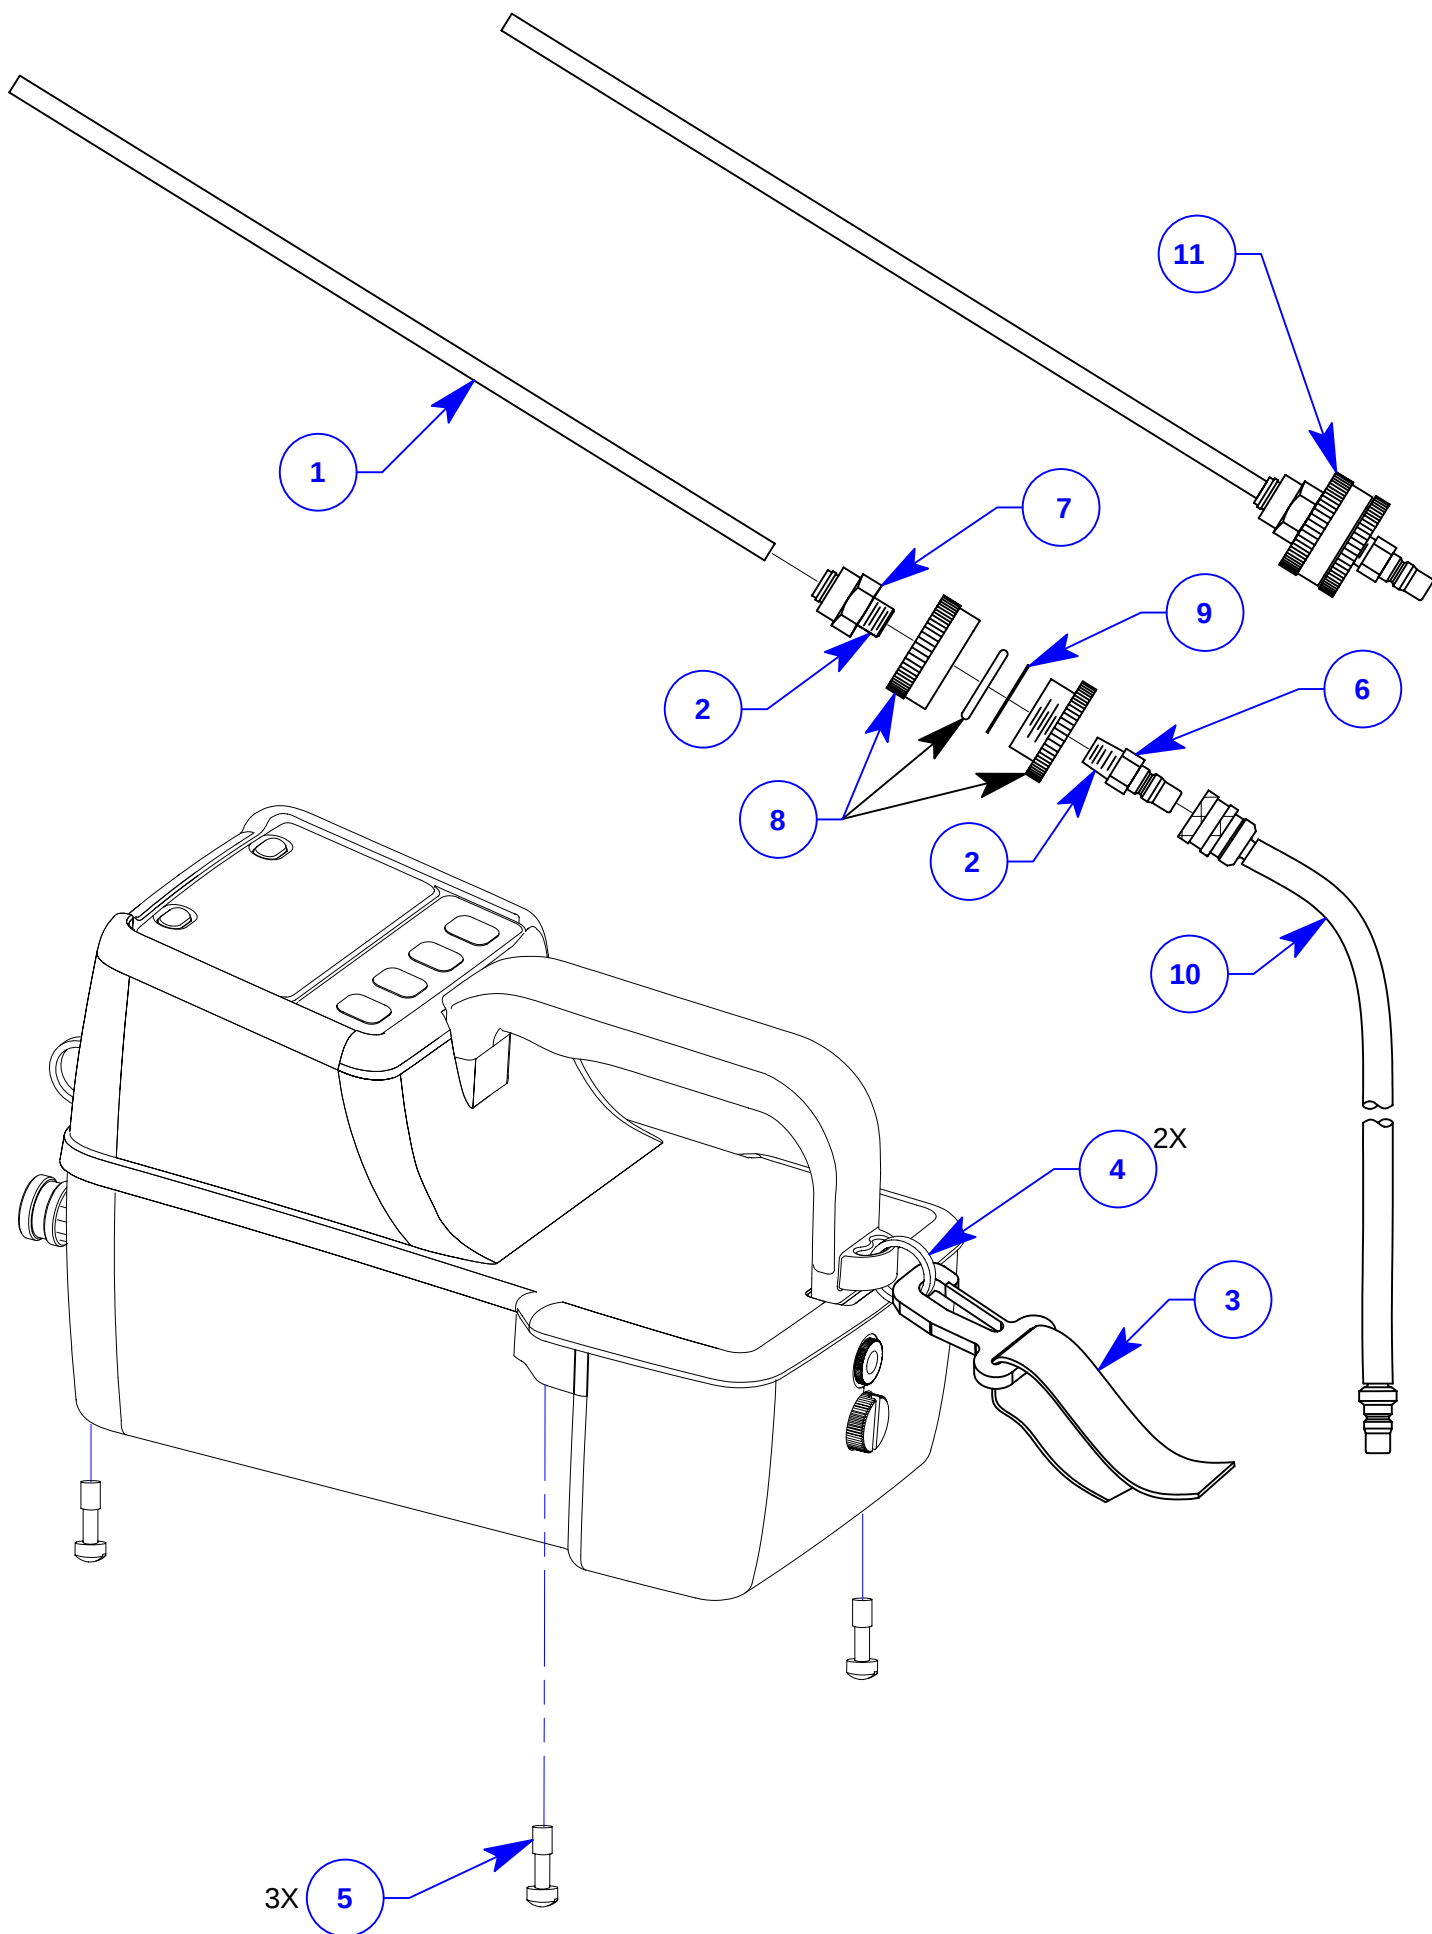

| Item | Part Number  | Description                                       | QTY |
|------|--------------|---------------------------------------------------|-----|
| 1    | 06-1242RK-01 | Tube, Polypropylene                               | 1   |
| 2    | 08-5051RK    | Teflon Tape                                       | .01 |
| 3    | 13-0100RK    | Shoulder Strap                                    | 1   |
| 4    | 13-0201RK    | Ring, Split .875" dia, SS                         | 2   |
| 5    | 13-1061RK    | Panel Screw, Captive, 6-32 x 1/2, PH Phillips, SS | 3   |
| 6    | 17-0505RK    | Fitting, w/1/8 NPT male/1641 male                 | 1   |
| 7    | 17-4807RK    | Fitting, 1/4 tube x 1/8 NPT male, push, PP        | 1   |
| 8    | 33-0155RK    | Filter Holder, for 25mm disk                      | 1   |
| 9    | 33-0156RK    | Filter, 25mm dia                                  | 1   |
| 10   | 80-0505RK    | 5 foot Sample Hose                                | 1   |
| 11   | 80-0131RK    | Probe, 10" hydrophobic                            | 1   |

| Item | Part Number | Description                            | QTY |
|------|-------------|----------------------------------------|-----|
| 1    | 17-0524RK   | Fitting, restrictor w/.055 dia hole    | 1   |
| 2    | 17-0603RK   | TEE, PP, 3/32 ID                       | 2   |
| 3    | 3-0173RK    | Filter, Helapet, PTFE, 3/16" hose barb | 1   |

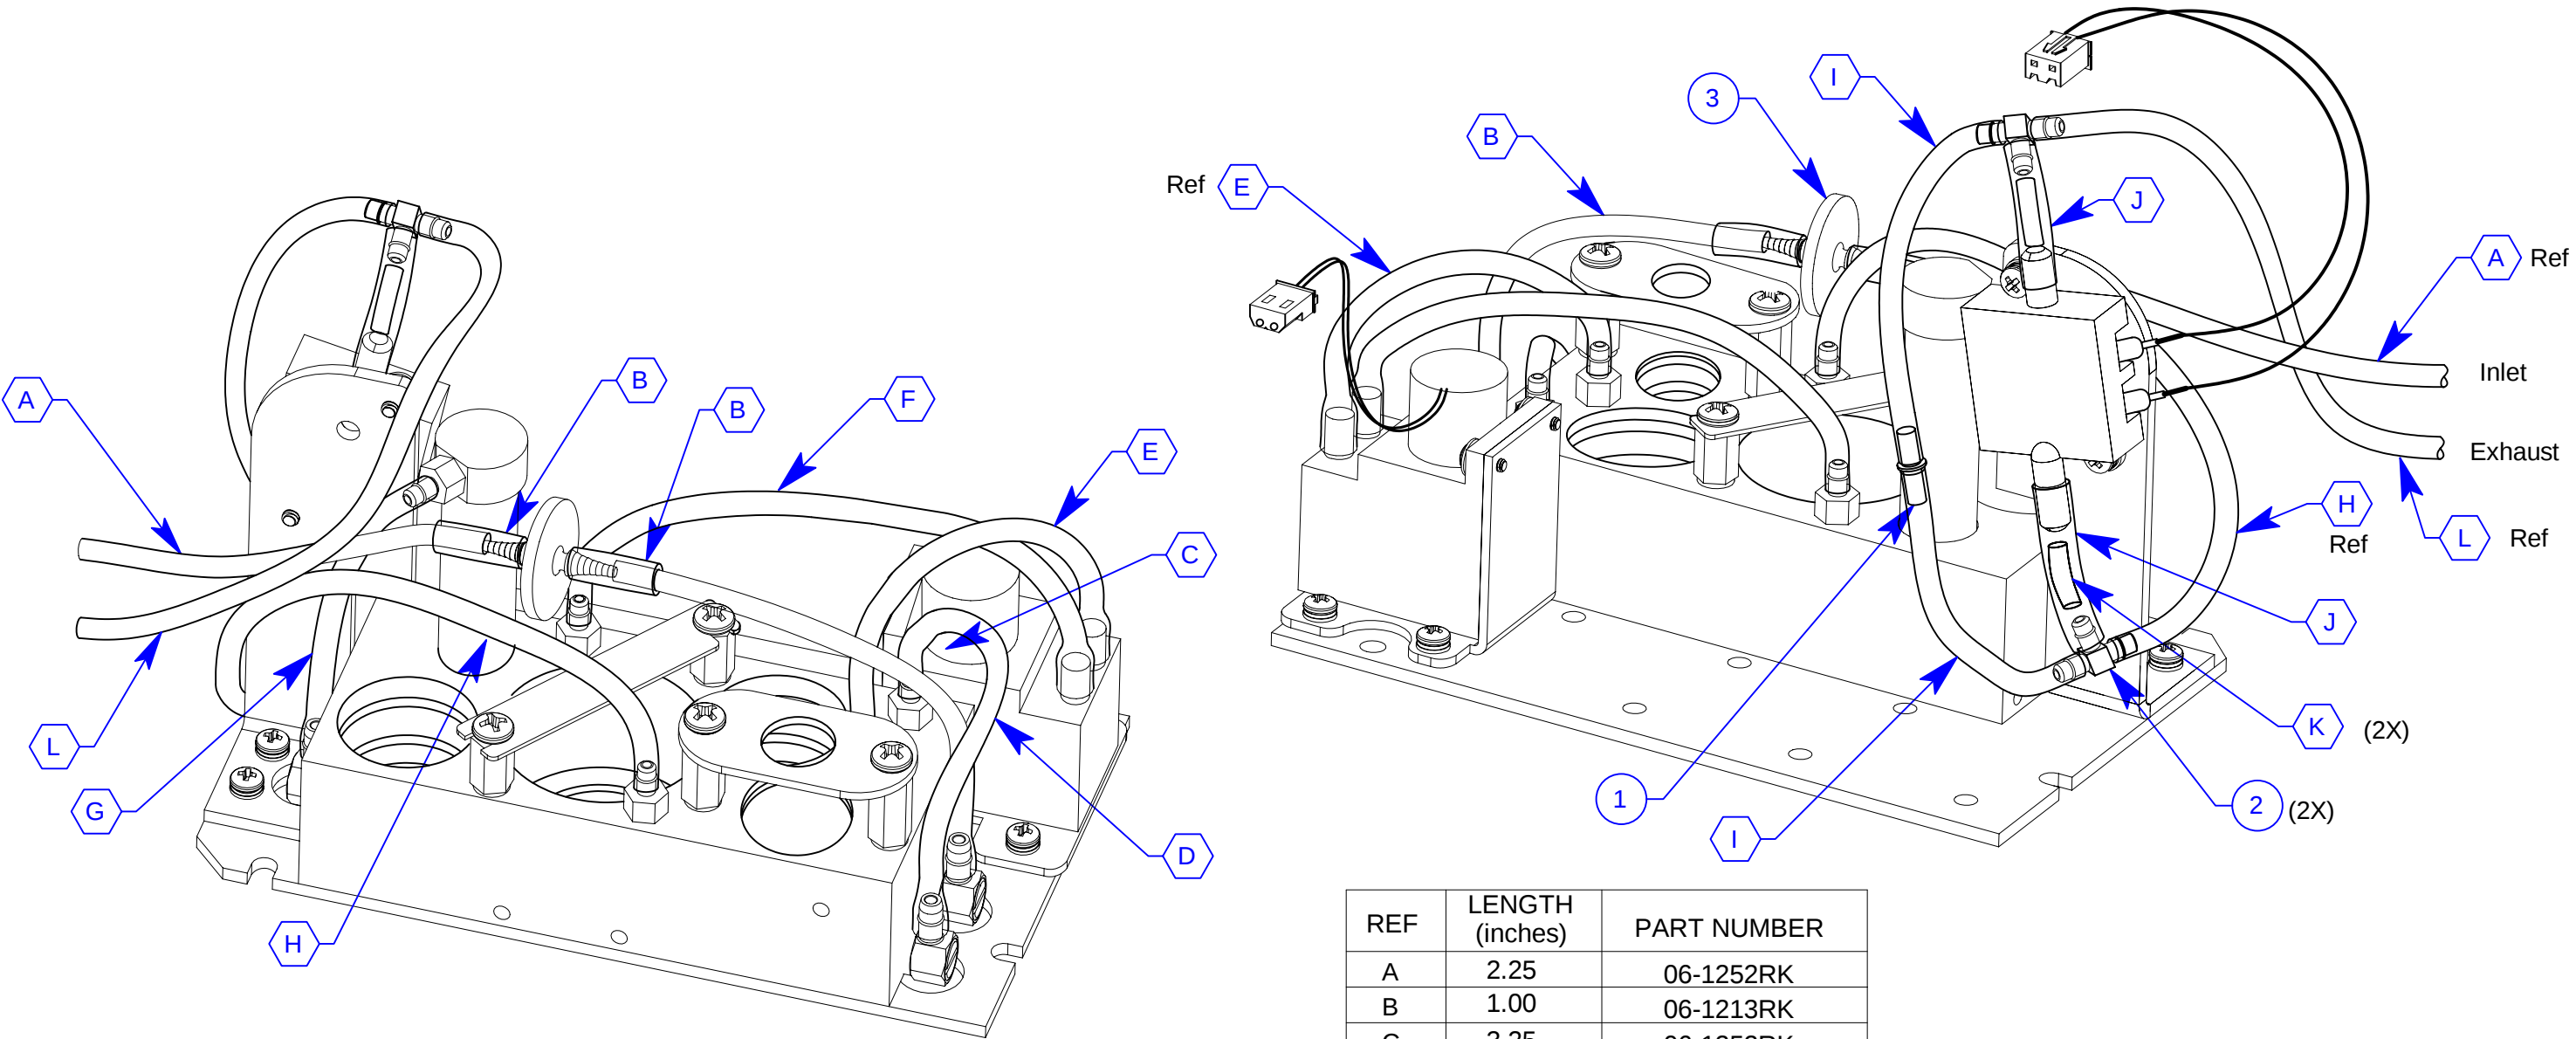

| REF    | LENGTH<br>(inches) | PART NUMBER |
|--------|--------------------|-------------|
| A      | 2.25               | 06-1252RK   |
| B      | 1.00               | 06-1213RK   |
| C      | 3.25               | 06-1252RK   |
| D      | 4.00               | 06-1199RK   |
| E      | 3.50               | 06-1199RK   |
| F      | 5.00               | 06-1199RK   |
| G      | 3.25               | 06-1199RK   |
| H      | 6.25               | 06-1199RK   |
| (2X) I | 2.50               | 06-1199RK   |
| (2X) J | 1.00               | 06-1252RK   |
| (2X) K | 0.25               | 04-0450RK   |
| L      | 5.00               | 06-1199RK   |